

# SUPER SLIMLINE 8W DOWNLIGHT

Ausdeck Super Slimline 8w downlight, with its advanced LED chip technology and unique 120° beam angle, not only increases power efficiency and light performance to provide unrivalled brightness, but also comes complete with plug-in lead and quick connect driver.

The Ausdeck Super Slimline 8w downlight is manufactured with a fire resistant enclosure, minimising the Ambient Operating Temperature which does not exceed 60°.

It is recommended that a clearance of 30mm be allowed, where possible, upon installation of the luminaire in insulated roofing panels.

## Suitable Applications


Cool Rooms, Commercial Kitchens, Patios, Pergolas, Carports, Industrial Roofing, Covered Walkways, Modular & Transportable Buildings, Offices and Homes.

## Technical Specifications

CODE	RING COLOUR	BRAND	DIMMABLE	COLOUR TEMP	WATTAGE	LUMEN	BEAM ANGLE	INPUT VOLTAGE	CUT OUT	IP	DIMENSIONS W x H	WARRANTY
LEDDLWLWWWD	White	<b>AUSDECK</b>	YES	3000k	8watt	490	120	240v	90mm	44	110mmx32mm	2 year

## INSTALLATION INFORMATION

### Driver Installation Options

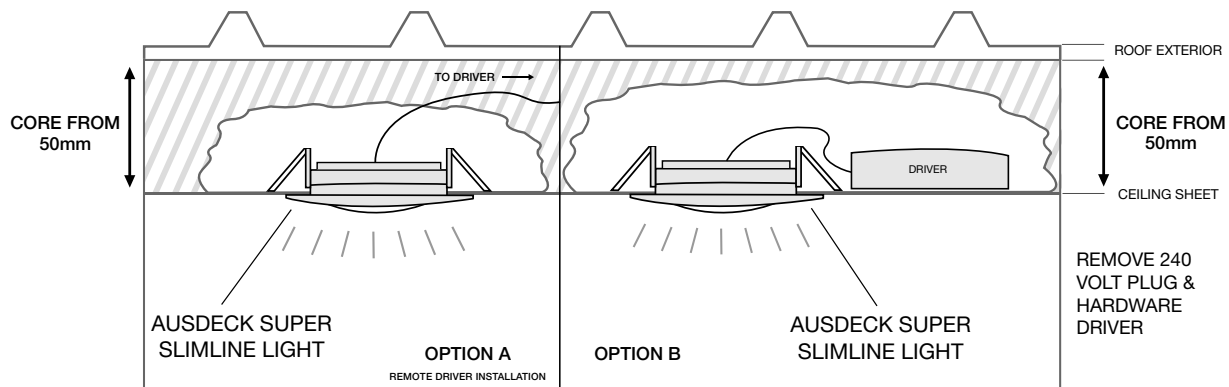

Leading & trailing edge dimmers are recommended for this product.

### Compatibility Specifications

Roof Panel Thickness	Installation Option	Light Dimensions W x H	Minimum Clearance
50mm	A or B	110mm 32mm	30mm
75mm	A or B	110mm 32mm	30mm
100mm	A or B	110mm 32mm	30mm
125mm	A or B	110mm 32mm	30mm
150mm	A or B	110mm 32mm	30mm