Roof Extenda BRACKET

Roof Extenda is a unique steel bracket offering structurally superior fixing of extended roof-lines to buildings.

Many builders consider that attaching pergolas, carports etc. to fascias to be an unsatisfactory and potentially dangerous practice.

Fascias are designed for spouting and eave lining, not for holding the weight of other structures.

Roof Extenda Bracket assists in reducing potential problems by allowing extended roof-lines to be supported by rafters, top plates and wall studs which have the structural integrity necessary for additional loads.

- Easy to install through tile and metal roofs no special tools are required.
- The extended roof-lines are raised above the spouting to provide easy access for cleaning and general maintenance.
- Airflow between roof-lines provides improved ventilation from summer heat.
- Adjustability allows run-off angle to be optimised and height for larger vehicles such as four wheel drives, boats, or caravans to go under.
- Weather Seal included (for flashing).

ANOTHER PRODUCT AVAILABLE


ShadeSailANCHOR

A better way of attaching Shade Sails to buildings. Easy to install through tile and metal roofs.



ANCHOR, Australia and New Zealand Patent Applied For 200620072

Roof Extenda BRACKET Installation



- 1) Remove roof tiles or lift roof sheets to achieve opening.
- 2) Bolt angle bracket with the threaded rod to the selected rafter with 2 x M12 hex bolts and washers. Provision has been made to fix the angle section to the existing wall plate to assist in reducing any uplift (refer to drawing) using 2 x M10 hex screws.
- **3)** Replace roof tiles or roof sheets, cutting the hole to allow the threaded rod to penetrate the roof.
- 4) The Weather Seal is fitted to the top bracket and is then wound down to the desired height and the lock nut tightened. Mark the position of the Weather Seal on the roofing. Slide the Weather Seal up to apply neutral cure silicone to the area marked, press the Weather Seal into position and finish with a bead of silicone to the edges of the Weather Seal to complete the fitting.

Note: Local council or shire approval may be required prior to construction.

Roof Extenda Pty Ltd accepts no responsibility for the type of construction undertaken.

COMPUTATIONS AVAILABLE ON REQUEST



PO Box 373 Hastings Vic 3915 ABN 39 073 621 208

Phone +61 (0) 3 5978 8755 Email info@roofextenda.com.au

Fax +61 (0) 3 5978 8016 Web www.roofextenda.com.au

Extended rod lengths are available via Special Order


AVAILABLE NATIONALLY

from Leading Timber and Hardware Merchants:

Queensland Roofing Warehouse
1 Rina Crt West Burleigh Gold Coast
Queensland 4220 Australia

Roof Extenda BRACKET

A better way for Pergulas ~ Carports and other recting projects

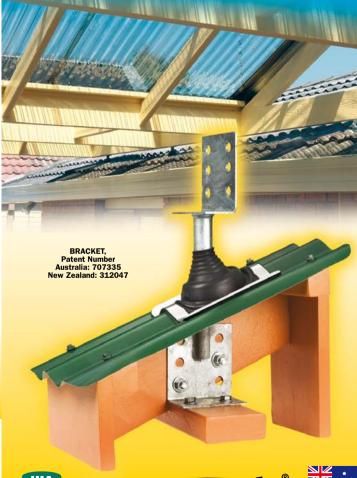










Roof Extenda Bracket



Suitable for • Pergolas • Carports • Gazebos • Pool Enclosures

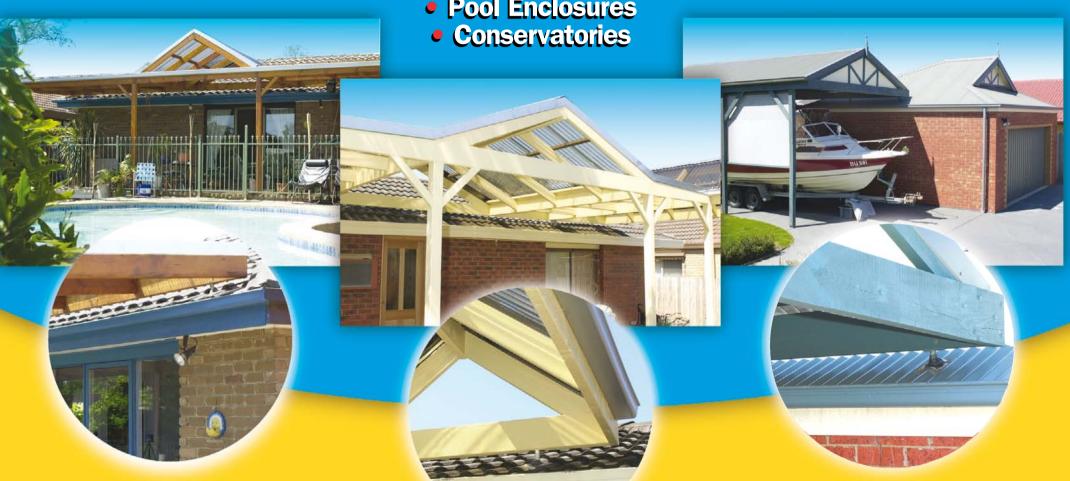

Ease of installation. Allows flow-through ventilation. **Attaches to rafter and wall top plate** rather than fascia for extra strength.

Allows extra height over driveways for larger vehicles, 4 wheel drives, boats or caravans to go under.

Roof Extenda Brackets are easy to install through tile and metal roofs – no special tools are required!